



1) Put the monitor inside the specified hole for mounting.
The hole should be more than $W_R \times H_R$ (mm).

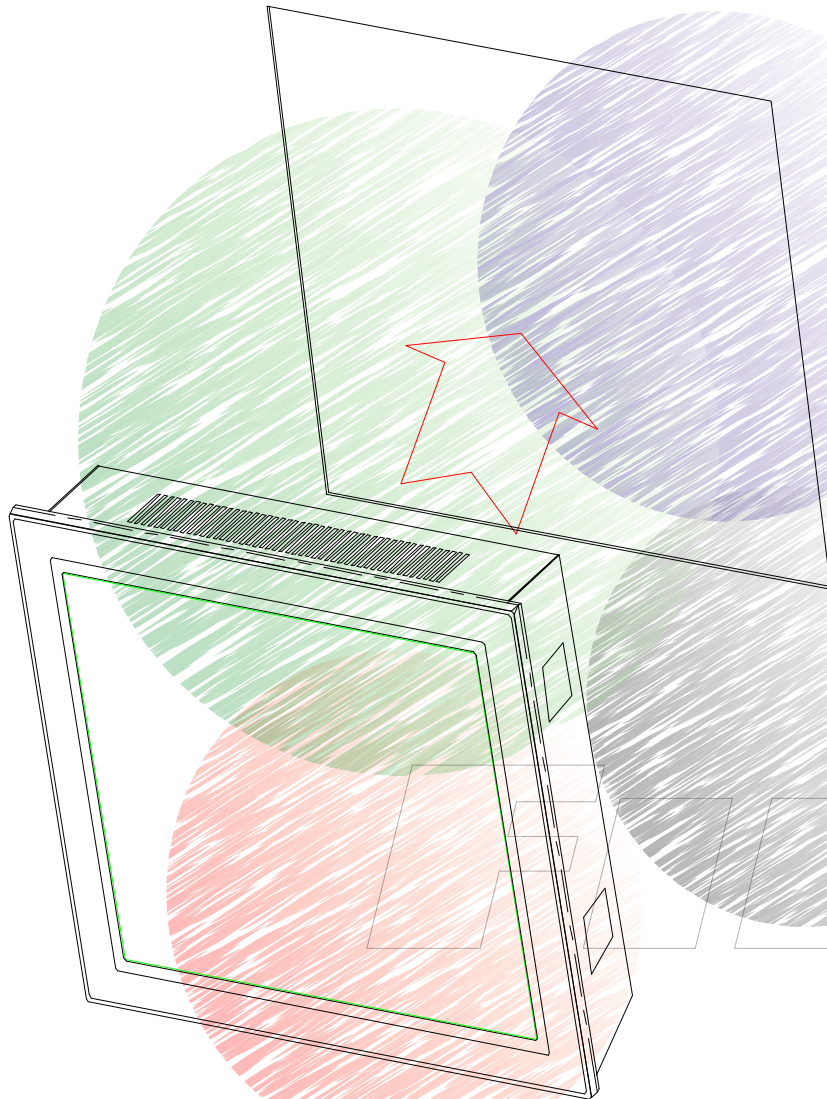


2) Join the lugs for panel mounting like a picture

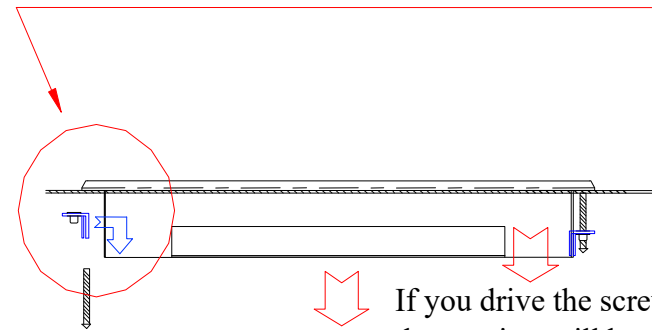

If you drive the screws,
the monitor will be moved
and fixed with your cabinet.

Your cabinet

3) Fix the monitor using screws.(M5)

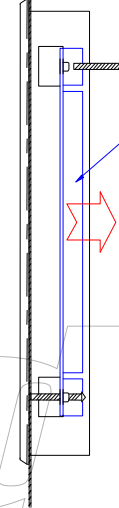

2pcs of lugs for panel mounting

If you drive the screws,
the monitor will be moved
and fixed with your cabinet.

The monitor will be fixed with your cabinet.
You can use a some gasket like a material of rubber
or sponge between the rear side of front bezel and
your cabinet.