


SUMMARY For OPEN FRAME MONITORS.


Issue Date 2021.12.30

Copyright (C) 2021 FINDUS All right reserved.
RM1205, A-BLD, SK V1 Tower.
#14, Galmachi-ro 288beon-gil, Jungwon-gu,
Seongnam-si, Gyeonggi-do, Korea.(13201)
<http://www.findus.kr>


The Model Names of Open Frame Monitors.

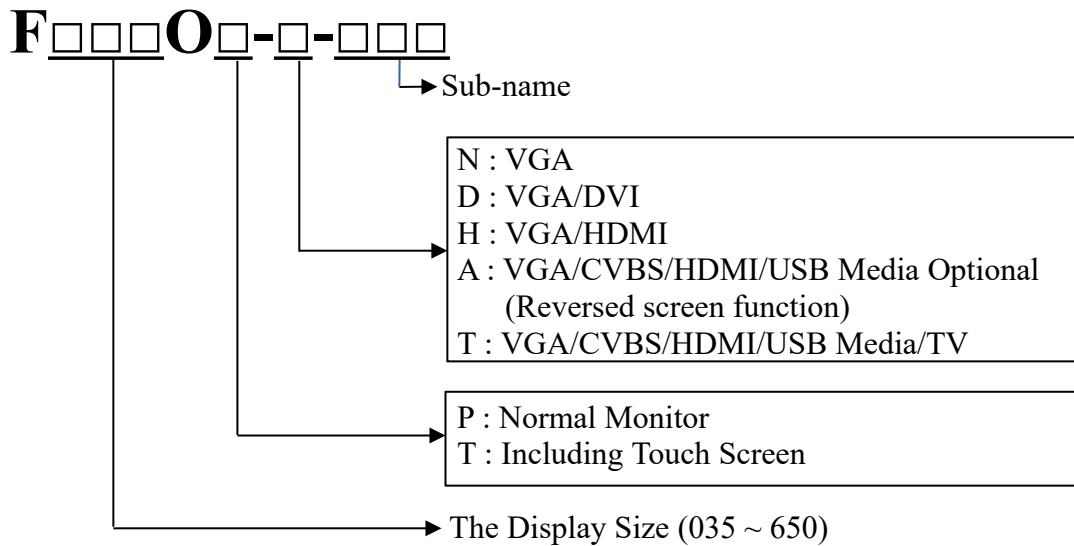

The Product Code of Open Frame Monitors.

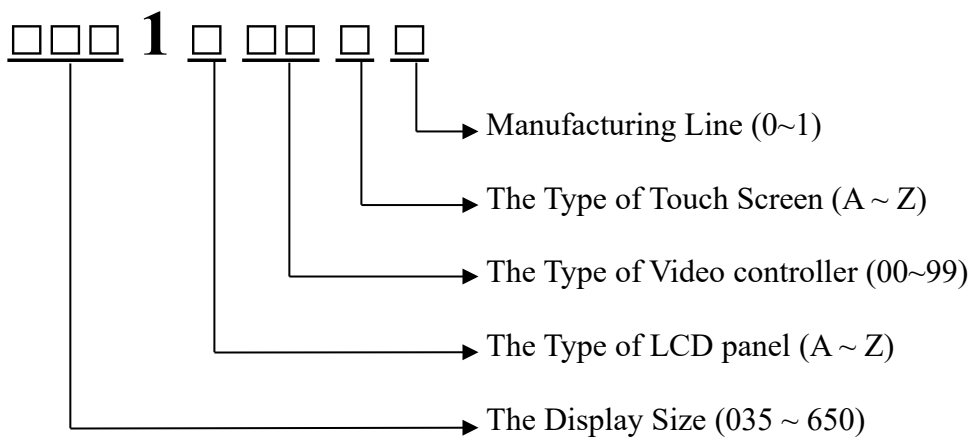

The Product Number of Open Frame Monitors.

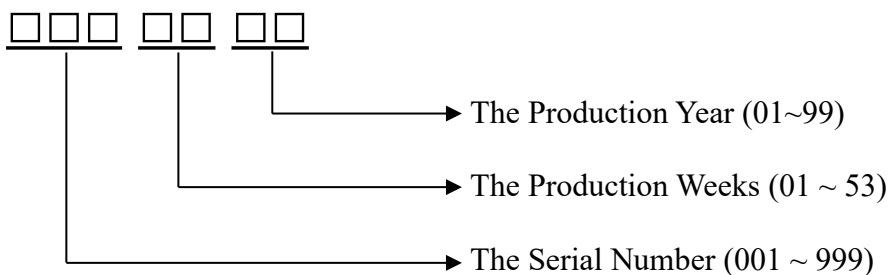

F056OT-D-S01

Screen Size(Diagonal)	5.6 "
Outline Dimension (LCD PANEL)	129.5mm(H) X 124.3mm(V) X 60.0mm(D)
Active area (LCD PANEL)	112.896 mm(H) X 84.672mm(V)
Bezel open (LCD PANEL)	115.7mm(H) X 87.47mm(V)
Backlight	LED
Resolution	640X480
Brightness	200 NIT(Without T/P)
Contrast ratio	500 : 1
Color depth	6-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	70/70, 50/70
Video input	VGA(640X480 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Analog resistive touch screen
Touch control	USB
MODEL F056OP-N-S01 of similarity	Without Touch screen

[Click to open dimensions.](#)

F065OT-D-S01

Screen Size(Diagonal)	6.5 "
Outline Dimension	190.0mm(H) X 150.0mm(V) X 44.0mm(D)
Active area	132.48 mm(H) X 99.36mm(V)
Bezel open	135.9mm(H) X 102.8mm(V)
Backlight	LED
Resolution	640X480
Brightness	800 NIT(Without T/P)
Contrast ratio	600 : 1
Color depth	6-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 70/70
Video input	VGA(640X480 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Analog resistive touch screen
Touch control	USB (RS232C Optional)
MODEL F065OP-N-S01 of similarity	Without Touch screen

[Click to open dimensions.](#)

F0700T-D-S01

Screen Size(Diagonal)	7 "
Outline Dimension	172.6mm(H) X 118.0mm(V) X 50.0mm(D)
Active area	152.4mm(H) X 91.44mm(V)
Bezel open	155.2mm(H) X 94.24mm(V)
Backlight	LED
Resolution	800 X 480
Brightness	300 NIT (Without T/P)
Contrast ratio	500 : 1
Color depth	6-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	65/65, 50/60
Video input	VGA(800X480 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys with Remote OSD function.
Touch screen	5 wire analog resistive touch screen
Touch control	USB (RS232C Optional)
MODEL F0700P-D-S01 of similarity	Without Touch screen

[Click to open dimensions.](#)

F0700T-D-EL1

Suffix(C05A)

Screen Size(Diagonal)	7 "
Outline Dimension	168.0mm(H) X 102.6mm(V) X 50.0mm(D)
Active area	154.21mm(H) X 85.92mm(V)
Bezel open	156.7mm(H) X 89.23mm(V)
Backlight	LED
Resolution	1024 X 600
Brightness	1,500 NIT (Without T/P)
Contrast ratio	800 : 1
Color depth	6-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 60/70
Video input	VGA(1024X600 60Hz)/HDMI
Power input	DC12V
OSD function	Control by 5-keys.
Touch screen	4 wire analog resistive touch screen
Touch control	USB (RS232C Optional)
MODEL F0700P-D-EL1 of similarity	Without Touch screen

[Click to open dimensions.](#)

F104OT-D-S11 & X11

Model Name	F104OT-D-S11	F104OT-D-X11
Screen Size(Diagonal)	10.4 "	
Outline Dimension	262.0mm(H) X 185.2mm(V) X 40.5mm(D)	
Active area	211.2mm(H) X 158.4mm(V)	
Bezel open	215.0mm(H) X 162.0mm(V)	
Backlight	LED	
Resolution	800 X 600	1024 X 768
Brightness	350 NIT (Without T/P)	
Contrast ratio	800 : 1	900 : 1
Color depth	6-bit	
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 65/75	75/75, 75/75
Video input	VGA(800X600 60Hz)/DVI	VGA(1024X768 60Hz)/DVI
Power input	DC12V	
OSD function	Control by 6-keys	
Touch screen	Resistive	
Touch control	USB	
MODEL F104OP-D-*11 of similarity MODEL F104O*-H-S11 of similarity MODEL F104OT-*-S12 of similarity	Without Touch screen Video input : VGA & HDMI Including P-CAP touch screen	

[Click to open dimensions.](#)

F104OT-D-S12 & X12

Model Name	F104OT-D-S12	F104OT-D-X12
Screen Size(Diagonal)	10.4 "	
Outline Dimension	262.0mm(H) X 185.2mm(V) X 42.1mm(D)	
Active area	211.2mm(H) X 158.4mm(V)	
Bezel open	215.0mm(H) X 162.0mm(V)	
Backlight	LED	
Resolution	800 X 600	1024 X 768
Brightness	350 NIT (Without T/P)	
Contrast ratio	800 : 1	900 : 1
Color depth	6-bit	
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 65/75	75/75, 75/75
Video input	VGA(800X600 60Hz)/DVI	VGA(1024X768 60Hz)/DVI
Power input	DC12V	
OSD function	Control by 6-keys	
Touch screen	Projected Capacitive 10 Points	
Touch control	USB	
MODEL F104OT-H-*12 of similarity	Video input : VGA & HDMI	

[Click to open dimensions.](#)

F121OP-D-C03

Screen Size(Diagonal)	12.1 "
Outline Dimension	286.0mm(H) X 240.0mm(V) X 42.3mm(D)
Active area	246.0mm(H) X 184.5mm(V)
Bezel open	249.2mm(H) X 187.8mm(V)
Backlight	LED
Resolution	800 X 600
Brightness	400 NIT (Without T/P)
Contrast ratio	500 : 1
Color depth	6-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	65/65, 50/60
Video input	VGA(800X600 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	NA
Touch control	NA
MODEL F121OP-D-X03 of similarity	The resolution : 1024X768

[Click to open dimensions.](#)

F121OP-D-CPS

Screen Size(Diagonal)	12.1 "
Outline Dimension	330.0mm(H) X 267.0mm(V) X 49.0mm(D)
Active area	246.0mm(H) X 184.5mm(V)
Bezel open	248.0mm(H) X 186.6mm(V)
Backlight	LED
Resolution	800 X 600
Brightness	400 NIT (Without T/P)
Contrast ratio	500 : 1
Color depth	6-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	65/65, 50/60
Video input	VGA(800X600 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	NA
Touch control	NA
MODEL F121OP-*-CPX of similarity MODEL F121OP-H-CP* of similarity	The resolution : 1024X768 VGA/HDMI

[Click to open dimensions.](#)

F121OT-D-S02 & X02

Model	F121OT-D-S02	F121OT-D-X02
Screen Size(Diagonal)	12.1 "	
Outline Dimension	285.0mm(H) X 211.5.0mm(V) X 41.4mm(D)	
Active area	246.0mm(H) X 184.5mm(V)	
Bezel open	249.2mm(H) X 187.8mm(V)	
Backlight	LED	
Resolution	800 X 600	1024 X 768
Brightness	400 NIT (Without T/P)	500 NIT (Without T/P)
Contrast ratio	500 : 1	700 : 1
Color depth	6-bit	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	65/65, 50/60	80/80, 80/80
Video input	VGA(800X600 60Hz)/DVI	VGA(1024X768 60Hz)/DVI
Power input	DC12V	
OSD function	Control by 6-keys	
Touch screen	Resistive	
Touch control	USB	
MODEL F121OP-D-X02 of similarity MODEL F121O*-H-X02 of similarity	Without Touch screen Video input : VGA & HDMI	

[Click to open dimensions.](#)

F150OT-D-S01

Screen Size(Diagonal)	15 "
Outline Dimension	337.4mm(H) X 258.0mm(V) X 46.1mm(D)
Active area	304.5mm(H) X 228.5mm(V)
Bezel open	307.4mm(H) X 231.3mm(V)
Backlight	LED
Resolution	1024 X 768
Brightness	350 NIT (Without T/P)
Contrast ratio	700 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 70/60
Video input	VGA(1024X768 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys with Remote OSD function
Touch screen	Resistive
Touch control	USB
MODEL F150OP-D-S01 of similarity MODEL F150O*-H-S01 of similarity	Without Touch screen Video input : VGA & HDMI

[Click to open dimensions.](#)

F150OT-D-S12

Screen Size(Diagonal)	15 "
Outline Dimension	340.0mm(H) X 264.0mm(V) X 45.5mm(D)
Active area	304.0mm(H) X 228.0mm(V)
Backlight	LED
Resolution	1024 X 768
Brightness	350 NIT (Without T/P)
Contrast ratio	700 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 70/60
Video input	VGA(1024X768 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys with Remote OSD function
Touch screen	Projected Capacitive 10 Points
Touch control	USB
MODEL F150OP-D-S02 of similarity MODEL F150O*-H-S02 of similarity	Without Touch screen Video input : VGA & HDMI

[Click to open dimensions.](#)

F150OT-D-C02

Screen Size(Diagonal)	15 "
Outline Dimension	386.0mm(H) X 304.0mm(V) X 55.0mm(D)
Active area	304.5mm(H) X 228.5mm(V)
Bezel open	307.4mm(H) X 231.3mm(V)
Backlight	LED
Resolution	1024 X 768
Brightness	350 NIT (Without T/P)
Contrast ratio	700 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 70/60
Video input	VGA(1024X768 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	SAW
Touch control	USB&RS232C COMBO
MODEL F150OP-D-C02 of similarity MODEL F150OT-D-C02S of similarity MODEL F150OT-D-C02S24 of similarity MODEL F150O*-H-C02 of similarity	Without Touch screen Screw terminal for power input Screw terminal for power input (DC24V) Video input : VGA & HDMI (Suffix F06C)

[Click to open dimensions.](#)

F1500T-D-C03

Screen Size(Diagonal)	15 "
Outline Dimension	352.0mm(H) X 267.5mm(V) X 48.0mm(D)
Active area	304.5mm(H) X 228.5mm(V)
Bezel open	307.4mm(H) X 231.3mm(V)
Backlight	LED
Resolution	1024 X 768
Brightness	350 NIT (Without T/P)
Contrast ratio	700 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 70/60
Video input	VGA(1024X768 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	SAW with 6mm tempered glass ** Anti-Vandalism
Touch control	USB&RS232C COMBO
MODEL F1500*-H-C03 of similarity	Video input : VGA & HDMI

[Click to open dimensions.](#)

F1700T-D-S01

Screen Size(Diagonal)	17 "
Outline Dimension	406.0mm(H) X 310.0mm(V) X 59.0mm(D)
Active area	337.92mm(H) X 270.34mm(V)
Bezel open	341.60mm(H) X 272.17mm(V)
Backlight	LED
Resolution	1280 X 1024
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 85/75
Video input	VGA(1280X1024 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	SAW
Touch control	USB&RS232C COMBO
MODEL F1700P-D-S01 of similarity	Without Touch screen
MODEL F1700T-D-S01-K6 of similarity	With SAW with 6mm tempered glass & COMBO
MODEL F1700*-H-S01 of similarity	Video input : VGA & HDMI

[Click to open dimensions.](#)

F1700T-D-C01

Screen Size(Diagonal)	17 "
Outline Dimension	394.9mm(H) X 302.5mm(V) X 51.7mm(D)
Active area	337.92mm(H) X 270.34mm(V)
Bezel open	341.60mm(H) X 272.17mm(V)
Backlight	LED
Resolution	1280 X 1024
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 85/75
Video input	VGA(1280X1024 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	5 wire Analog Resistive
Touch control	USB
MODEL F1700P-D-C01 of similarity MODEL F1700*-H-C01 of similarity	Without Touch screen Video input : VGA & HDMI

[Click to open dimensions.](#)

F1900T-D-W01

Screen Size(Diagonal)	19 "
Outline Dimension	398.4mm(H) X 330.0mm(V) X 44.4(D)
Active area	374.78mm(H) X 299.88mm(V)
Bezel open	380.3mm(H) X 305.0mm(V)
Backlight	LED
Resolution	1280 X 1024
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1280X1024 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Resistive
Touch control	USB
MODEL F1900P-D-W01 of similarity MODEL F1900*-H-W01 of similarity	Without Touch screen Video input : VGA & HDMI

[Click to open dimensions.](#)

F1900T-D-C02

Screen Size(Diagonal)	19 "
Outline Dimension	436.0mm(H) X 334.0mm(V) X 59.0mm(D)
Active area	376.32mm(H) X 301.05mm(V)
Bezel open	380.3mm(H) X 305.0mm(V)
Backlight	LED
Resolution	1280 X 1024
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	80/80, 85/75
Video input	VGA(1280X1024 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	SAW
Touch control	USB&RS232C COMBO
MODEL F1900P-D-C02 of similarity	Without Touch screen
MODEL F1900T-D-C02S of similarity	Screw terminal for power input
MODEL F1900T-D-C02S24 of similarity	Screw terminal for power input (DC24V)
MODEL F1900T-D-W02 of similarity	Wide view angle 89/89, 89/89

[Click to open dimensions.](#)

F1900T-D-W04

Screen Size(Diagonal)	19 "
Outline Dimension	417.4mm(H) X 342.4mm(V) X 48.4mm(D)
Active area	374.78mm(H) X 299.88mm(V)
Bezel open	377.0mm(H) X 302.0mm(V)
Backlight	LED
Resolution	1280 X 1024
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1280X1024 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Infrared Touch screen
Touch control	USB
MODEL F1900*-H-W04 of similarity	10 Point Multi-Touch Anti-sunlight & No blind zone Video input : VGA & HDMI

[Click to open dimensions.](#)

F1900T-D-S02

Screen Size(Diagonal)	19 "
Outline Dimension	424.0mm(H) X 349.0mm(V) X 44.5mm(D)
Active area	376.32mm(H) X 301.05mm(V)
Bezel open	377.3mm(H) X 302.0mm(V)
Backlight	LED
Resolution	1280 X 1024
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1280X1024 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Projected Capacitive with Rounded Bezel
Touch control	USB
MODEL F1900*-H-S02 of similarity MODEL F1900T*-EX2 of similarity	10 Point Multi-Touch function Remote OSD function Video input : VGA & HDMI (Suffix E06*) Explosion-proof function

[Click to open dimensions.](#)

F1950T-D-EL1

Screen Size(Diagonal)	19.5 "
Outline Dimension	464.4mm(H) X 277.4mm(V) X 49.7mm(D)
Active area	433.92mm(H) X 236.36mm(V)
Cover Glass Size	461.0mm(H) X 274.0mm(V)
Backlight	LED
Resolution	1600 X 900
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	85/85, 75/85
Video input	VGA(1600X900 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Projected Capacitive
Touch control	USB
MODEL F1950*-H-EL1 of similarity	10 Point Multi-Touch Video input : VGA & HDMI

[Click to open dimensions.](#)

F201OT-D-C01

Screen Size(Diagonal)	20.1 "
Outline Dimension	434.4mm(H) X 337.0mm(V) X 60.7mm(D)
Active area	408.0mm(H) X 306.0mm(V)
Bezel open	413.0mm(H) X 311.0mm(V)
Backlight	CCFL
Resolution	1600X1200
Brightness	300 NIT (Without T/P)
Contrast ratio	800 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1600X1200 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Resistive
Touch control	USB
MODEL F201OP-D-C01 of similarity	Without Touch screen

[Click to open dimensions.](#)

F215OT-D-C01

Screen Size(Diagonal)	21.5 "
Outline Dimension	498.0mm(H) X 300.0mm(V) X 54.0mm(D)
Active area	476.64mm(H) X 268.11mm(V)
Bezel open	479.84mm(H) X 271.31mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	250 NIT (Without T/P)
Contrast ratio	3000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Resistive
Touch control	USB
MODEL F215OP-D-C01 of similarity MODEL F215O*-H-C01 of similarity	Without Touch screen Video input : VGA & HDMI (Suffix D06B)

[Click to open dimensions.](#)

F2150T-D-UB2

Screen Size(Diagonal)	21.5 "
Outline Dimension	529.0mm(H) X 320.0mm(V) X 54.6mm(D)
Active area	477.0mm(H) X 268.0mm(V)
Bezel open	477.0mm(H) X 268.0mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	250 NIT (Without T/P)
Contrast ratio	3000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Infrared touch screen
Touch control	USB
MODEL F2150*-H-UB2 of similarity	Anti-sunlight & No Blind zone 4 point Multi-Touch. Video input : VGA & HDMI (Suffix D06H)

[Click to open dimensions.](#)

F2150T-D-ST1

Screen Size(Diagonal)	21.5 "
Outline Dimension	500.0mm(H) X 311.0mm(V) X 48.0mm(D)
Active area	476.64mm(H) X 268.11mm(V)
Bezel open	477.6mm(H) X 269.1mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	250 NIT (Without T/P)
Contrast ratio	3000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Projected Capacitive touch screen
Touch control	USB
MODEL F2150T-H-ST1 of similarity	Video input : VGA & HDMI 10 point Multi-Touch.

[Click to open dimensions.](#)

F2200T-D-C03

Screen Size(Diagonal)	22 "
Outline Dimension	Max566.0mm(H) X 384.0mm(V) X 55.3mm(D)
Active area	473.76mm(H) X 296.1mm(V)
Bezel open	477.7mm(H) X 300.1mm(V)
Backlight	LED
Resolution	1680 X 1050
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	85/85, 75/85
Video input	VGA(1680X1050 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys (Remote OSD)
Touch screen	SAW
Touch control	USB&RS232C COMBO
MODEL F2200P-D-C03 of similarity MODEL F2200T-D-C01 of similarity MODEL F2200*-H-C03 of similarity	Without Touch screen Resistive touch screen & USB Video input : VGA & HDMI

[Click to open dimensions.](#)

F2200T-D-C04

Suffix(E03E)

Screen Size(Diagonal)	22 "
Outline Dimension	Max566.0mm(H) X 384.0mm(V) X 55.3mm(D)
Active area	473.76mm(H) X 296.1mm(V)
Bezel open	475.0mm(H) X 297.0mm(V)
Backlight	LED
Resolution	1680 X 1050
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	85/85, 75/85
Video input	VGA(1680X1050 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys (Remote OSD)
Touch screen	Infrared with 2 point dual touch.
Touch control	USB
MODEL F2200*-H-C04 of similarity	Video input : VGA & HDMI

[Click to open dimensions.](#)

F238OT-D-S02

Screen Size(Diagonal)	23.8 "
Outline Dimension	576.0mm(H) X 352.0mm(V) X 55.5mm(D)
Active area	527.5mm(H) X 299.0mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Projected Capacitive 10 Points
Touch control	USB
MODEL F238OT-H-S02 of similarity	Video input : VGA & HDMI
Click to open dimensions.	

F238OT-D-LL1

Screen Size(Diagonal)	23.8 "
Outline Dimension	535.24mm(H) X 314.68mm(V) X 44.5mm(D)
Active area	527.04mm(H) X 296.46mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Projected Capacitive 10 Points
Touch control	USB
MODEL F238OT-H-LL1 of similarity MODEL F238OP-*-LL1 of similarity	Video input : VGA & HDMI (Suffix B06N) Without Touch Screen Function (Suffix C0*N)
Click to open dimensions.	

F240OT-D-X03

Screen Size(Diagonal)	24 "
Outline Dimension	Max604.0mm(H) X 410.0mm(V) X 55.3mm(D)
Active area	518.4mm(H) X 324.0mm(V)
Bezel open	522.4mm(H) X 328.0mm(V)
Backlight	LED
Resolution	1920 X 1200
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1200 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys (Remote OSD)
Touch screen	SAW
Touch control	USB&RS232C COMBO
MODEL F240OP-D-X01 of similarity MODEL F240OT-D-X01 of similarity	Without Touch screen Resistive touch screen & USB

[Click to open dimensions.](#)

F270OT-D-UB1

Suffix(A03H)

Screen Size(Diagonal)	27 "
Outline Dimension	653.0mm(H) X 392.0mm(V) X 57.6mm(D)
Active area	597.6mm(H) X 336.2mm(V)
Bezel open	602.0mm(H) X 341.0mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	300 NIT (Without T/P)
Contrast ratio	3000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Infrared touch screen
Touch control	USB
MODEL F270OT-H-UB1 of similarity	Anti-sunlight & No Blind Zone 4 point Multi-Touch. Video input : VGA & HDMI

[Click to open dimensions.](#)

F2700T-H-LL1

Screen Size(Diagonal)	27 "
Outline Dimension	607.10mm(H) X 355.75mm(V) X 44.70mm(D)
Active area	597.89mm(H) X 336.31mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	250 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/HDMI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Projected Capacitive 10 points
Touch control	USB
MODEL F2700T-D-LL1 of similarity MODEL F2700P-*-LL1 of similarity	Anti-glare 10 point Multi-Touch. Video input : VGA & DVI Without Touch screen function

[Click to open dimensions.](#)

F2700T-H-S02

Screen Size(Diagonal)	27 "
Outline Dimension	645.0mm(H) X 385.5mm(V) X 50.5mm(D)
Active area	597.89mm(H) X 336.31mm(V)
Bezel open	599.60mm(H) X 338.15mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	300 NIT (Without T/P)
Contrast ratio	1000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/HDMI
Power input	DC12V
OSD function	Control by 6-keys
Touch screen	Projected Capacitive 10 points
Touch control	USB
MODEL F2700T-D-S02 of similarity	Video input : VGA & DVI

[Click to open dimensions.](#)

F3200T-D-S01

Screen Size(Diagonal)	32 "
Outline Dimension	750.2mm(H) X 444.6mm(V) X 76.0mm(D)
Active area	698.4mm(H) X 392.85mm(V)
Bezel open	702mm(H) X 398mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	400 NIT (Without T/P)
Contrast ratio	3000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	AC100~240V(50/60Hz)
OSD function	Control by 6-keys with remote OSD
Touch Screen	Infrared touch screen
Touch control	USB
F3200P-*-S01 of similarity F3200*-H-S01 of similarity	Without Touch Screen With HDMI - Including 2X4W Speaker - Usable for portrait type - 300 X 300 VESA Mountable.

[Click to open dimensions.](#)

F3200T-H-S12

Screen Size(Diagonal)	32 "
Outline Dimension	757.12mm(H) X 450.6mm(V) X 60.75mm(D)
Active area	698.40mm(H) X 392.85mm(V)
Bezel open	699.40mm(H) X 393.84mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	400 NIT (Without T/P)
Contrast ratio	1200 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/HDMI
Power input	AC100~240V(50/60Hz)
OSD function	Control by 6-keys with remote OSD
Touch Screen	Projected Capacitive (10 points)
Touch control	USB
F3200T-D-S12 of similarity	With DVI

[Click to open dimensions.](#)

F420OT-D-S01

Screen Size(Diagonal)	42 "
Outline Dimension	982.4mm(H) X 576.4mm(V) X 74.4mm(D)
Active area	930.24mm(H) X 523.26mm(V)
Bezel open	935mm(H) X 529mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	500 NIT (Without T/P)
Contrast ratio	2000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	AC100~240V(50/60Hz)
OSD function	Control by 6-keys
Touch screen	Infrared touch screen
Touch control	USB
F420OP-*-*01 of similarity Suffix A03F of similarity F420O*-H-*01 of similarity	Without Touch Screen With brightness 700nit With HDMI - Usable for portrait type

[Click to open dimensions.](#)

F420OT-H-P01

Screen Size(Diagonal)	42 "
Outline Dimension	977.8mm(H) X 585.8mm(V) X 66.7mm(D)
Active area	930.24mm(H) X 523.26mm(V)
Bezel open	935mm(H) X 529mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	400 NIT (Without T/P)
Contrast ratio	3000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/HDMI
Power input	AC100~240V(50/60Hz)
OSD function	Control by 6-keys
Touch screen	Projected Capacitive
Touch control	USB
F420OP-*-*P01 of similarity	Without Touch Screen - Supported HID Driver - 10 Point Multi-Touch - Usable for portrait type

[Click to open dimensions.](#)

F460OT-D-S01

Screen Size(Diagonal)	46 "
Outline Dimension	1066.6mm(H) X 621.2mm(V) X 67.2mm(D)
Active area	1018.08mm(H) X 572.67mm(V)
Bezel open	1023.8mm(H) X 575.4mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	1,500 NIT (Without T/P)
Contrast ratio	4000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	AC100~240V(50/60Hz)
OSD function	Control by 6-keys
Touch screen	Infrared touch screen
Touch control	USB
The suffix “A03H” and “B03H” is Model F460OT-H-S01 of similarity is	Sunlight Readable Touch Monitor with Slim Design. Anti-Sunlight & No Blind zone touch screen. HID compatible up to 10 touch points. - Brightness is “700” and “500” - VGA/HDMI Click to open dimensions.

F490OT-D-S01

Screen Size(Diagonal)	48.5 "
Outline Dimension	1127.0mm(H) X 654.8mm(V) X 79.7mm(D)
Active area	1073.8mm(H) X 604.0mm(V)
Bezel open	1079.0mm(H) X 607.0mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	700 NIT (Without T/P)
Contrast ratio	1300 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	AC100~240V(50/60Hz)
OSD function	Control by 6-keys
Touch screen	Infrared touch screen
Touch control	USB
Suffix “A03F” is F490O*-H-S01 of similarity	HID compatible up to 10 touch points. Brightness is “500”Nit With HDMI - AG coated glass optional Click to open dimensions.

F550OT-D-S01

Screen Size(Diagonal)	55 "
Outline Dimension	1263.4mm(H) X 732.4mm(V) X 72.5mm(D)
Active area	1209.6mm(H) X 680.4mm(V)
Bezel open	1214mm(H) X 683mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	450 NIT (Without T/P)
Contrast ratio	2000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	AC100~240V(50/60Hz)
OSD function	Control by 6-keys
Touch screen	Infrared touch screen
Touch control	USB
F550OP-*-*01 of similarity F550O*-*-Z01 of similarity F550O*-*-*01-700 of similarity F550O*-H-*01 of similarity	Without Touch Screen Without Painting and Front bezel . With brightness 700nit With HDMI - Usable for portrait type

[Click to open dimensions.](#)

F650OT-D-S01

Screen Size(Diagonal)	64.53 "
Outline Dimension	1547.4mm(H) X 917.4mm(V) X 103.5mm(D)
Active area	1428.48mm(H) X 803.52mm(V)
Bezel open	1432mm(H) X 810mm(V)
Backlight	LED
Resolution	1920 X 1080
Brightness	360 NIT (Without T/P)
Contrast ratio	4000 : 1
Color depth	8-bit
Viewing angle (CR>10) Right/Left, Up/Down(Degrees)	89/89, 89/89
Video input	VGA(1920X1080 60Hz)/DVI
Power input	AC100~240V(50/60Hz)
OSD function	Control by 6-keys with Remote OSD
Touch screen	Infrared touch screen
Touch control	USB
MODEL F650OP-*-*S01 of similarity The suffix "B03F" & The suffix "C03F" is MODEL F650O*-H-S01 of similarity	Without Touch Screen With high brightness 450Nit & With high brightness 700Nit Additional HDMI port

[Click to open dimensions.](#)